

10/531866
PCT/IB 03/04611

Rec'd CT/PTO 17.10.03
18 APR 2005
INVESTOR IN PEOPLE



REC'D 24 OCT 2003
WIPO PCT


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

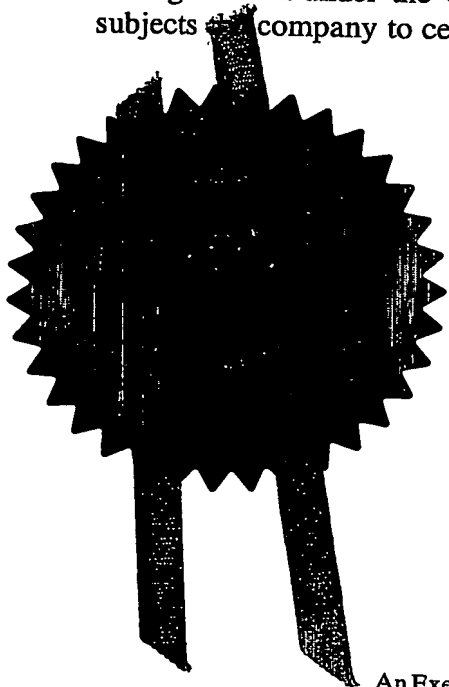

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed
Dated 30 September 2003
[Signature]

Best Available Copy

Patents Form 1/77
THE PATENT OFFICE

1/77

The
Patent
Office

The Patent Office

22 OCT 2002
Patents Act 1977

(Rules 16)

RECEIVED BY FAX

Request for grant of a patent

(See the notes on the back of this form. You can also get
an explanatory leaflet from the Patent Office to help
you fill in this form)

22OCT02 E757622-1 Cardiff Road
P01/7700 0.00-0224513.2 Newport

Gwent NP9 1RH

1. Your reference 2002CH009

2. Patent application number 0224513.2
(The Patent Office will fill in this part)3. Full name, address and postcode of the or of
each applicant (underline all surnames)CLARIANT INTERNATIONAL LTD
Rothausstrasse 61
CH-4132 Muttenz

Patents ADP number (if you know it)

6971634001

If the applicant is a corporate body, give the
country/state of its incorporation

Switzerland

4. Title of the invention AZO COMPOUNDS

5. Name of your agent (if you have one) CLARIANT UK LTD
Attn. Ms. Anne Plowden
Calverley Lane
Horsforth/Leeds, LS18 4RP
"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Patents ADP number (if you know it)

7156086001

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)7. If this application is divided or otherwise
derived from a earlier UK application,
give the number and the filing date of
the earlier application

Number of earlier application

Date of filing
(day / month / year)8. Is a statement of inventorship and of right
to grant of a patent required in support of
this request? (Answer "Yes" if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an
applicant, or
c) any named applicant is a corporate body.
See note (d)) Yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for each of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

21 ✓

Claim(s)

4 ✓

Abstract

1 ✓

Drawing (s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Clariant International Ltd Date October 22, 2002

Dr. Dieter Dünwald

Patent Attorney

C. Heusler
Christel Heusler
Patent Administrator

12. Name and daytime telephone number of person to contact in the United Kingdom

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patent Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes


- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filed in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PATENTS FORM 1/77

AZO COMPOUNDS

The present invention relates to novel disperse dyes, to their preparation, and to the use thereof for dyeing and printing regenerated or synthetic hydrophobic materials and/or blends comprising regenerated or synthetic hydrophobic materials.

The present invention relates to novel dyestuffs of formula (I)

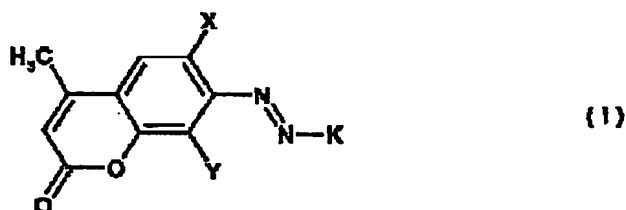

wherein

- 10 X signifies H; halogen, preferably Cl or Br; -CN; -SO₂CH₃; -OH; -OCH₃ or -NO₂,
Y signifies H; halogen, preferably Cl or Br; or -CN, and
K signifies a coupling component radical of the 6-hydroxypyridone-2, aniline, α-naphthylamine, 5-aminopyrazole, 5-hydroxypyrazole, indole, tetrahydroquinoline, 2-aminothiazole, 2-aminothiophene, phenole, 2-naphthol, benzomorpholine or 2,6-diaminopyridine series.


In formula I, preferably

- X signifies H; halogen, preferably Cl or Br; -CN, or -NO₂,
Y signifies H; halogen, preferably Cl or Br; or -CN, and
20 K signifies a coupling component radical of the 6-hydroxypyridone-2, aniline or 5-hydroxypyrazole series

More preferred coupling component radical K are of the 6-hydroxypyridone-2 or aniline series.

More preferred coupling component radical K are of the 6-hydroxypyridone-2 serie.

Particularly preferred are dyestuffs of formula (I-A)

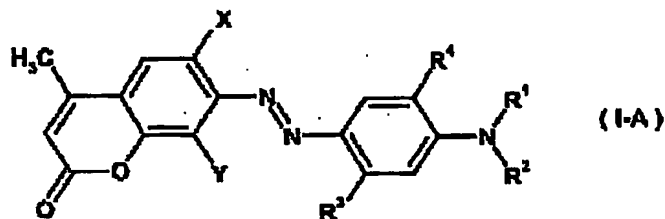

5 wherein

X signifies H; halogen, preferably Cl or Br; -CN, -OH; -OCH₃ or -NO₂,

Y signifies H; halogen, preferably Cl or Br; or -CN, and

10 R¹ signifies C₁₋₆-alkyl; substituted C₂₋₄-alkyl, preferably substituted by one or more substituents of the group consisting of halogen, -CN, -SCN -OC₁₋₄-alkyl, -OCOC₁₋₃-alkyl, -OCHO, -OC₆H₅ and -C₆H₅; C₃₋₄-alkenyl; substituted C₃₋₄-alkenyl, preferably substituted by -Cl or -Br; C₃₋₄-alkinyl, preferably propargyl; C₂₋₄-alkylene-OCO-C₁₋₃-alkyl; C₂₋₄-alkylene-O(CO)O-C₁₋₃-alkyl; C₁₋₃alkylene-COO-R⁵; -C₁₋₃-alkylene-COO-C₂₋₃-alkylene-N-phthalimid; C₁₋₃-alkylene-COOCH₂COOR⁵ or C₁₋₃-alkylene-COOCH₂COR⁶,

15

wherein R⁵ signifies C₁₋₄-alkyl; C₁₋₂-alkoxyethyl; C₃₋₄-alkenyl; C₃₋₄-alkinyl; cinnamyl; phenoxyethyl; phenyl-C₁₋₃alkyl; tetrahydrofurfuryl-2; phenyl or phenyl, which is substituted by -CH₃, -OCH₃, -COOCH₃ or -COOC₂H₅,

20

R⁶ signifies C₁₋₄-alkyl; phenyl or substituted phenyl, preferably substituted by one or more substituents of the group consisting of -CH₃, -OCH₃, -OC₂H₅, halogen and -OH,

R² signifies H; C₁₋₆-alkyl; substituted C₂₋₄-alkyl, preferably substituted by one or more substituents of the group consisting of halogen, -CN, -OH, -OC₁₋₄-alkyl, -OCOC₁₋₃-alkyl, -OC₆H₅ and -C₆H₅; C₃₋₄-alkenyl; substituted C₃₋₄-alkenyl, preferably substituted by -Cl or -Br; C₃₋₄-alkinyl, preferably propargyl; C₂₋₄-alkylene-OCO-C₁₋₃-alkyl or C₁₋₃alkylene-COO-R⁵,

25

R^3 signifies H; CH_3 ; $-NHCO-A^1$ or $-NHCOO-A^2$,

wherein


A^1 signifies H; C_{1-4} -alkyl; C_{2-3} -alkenyl; phenyl; $-NH_2$ or substituted C_{1-2} -alkyl, preferably substituted by one or more substituents of the group consisting of $-OH$, $-Cl$, $-OCH_3$, OC_2H_5 and $-C_6H_5$,

A^2 signifies C_{1-4} -alkyl or substituted C_{2-4} -alkyl, preferably substituted by one substituents of the group consisting of $-Cl$, $-OCH_3$ and $-OC_2H_5$, and

R^4 signifies H; halogen or C_{1-4} alkoxy,

as well as mixtures thereof.

Further particularly preferred are dyestuffs of formula (I-B)

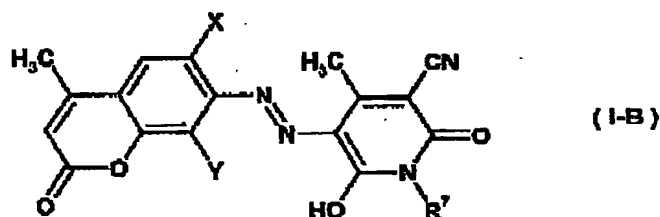

wherein


X signifies H; halogen, preferably Cl or Br; $-OH$; $-OCH_3$ or NO_2

Y signifies H,

R^7 signifies H; C_{1-6} -alkyl; substituted C_{2-4} -alkyl, preferably substituted by one substituent of the group consisting of halogen, $-CN$, $-OH$, $-OC_{1-4}$ -alkyl, $-OCOC_{1-2}$ -alkyl, $-OC_6H_5$ and $-C_6H_5$ or C_{1-2} -alkylene- $COOR^5$; $-NHC_6H_5$ or $-NH_2$,

as well as mixtures thereof.

Further particularly preferred are dyestuffs of formula (I-C)

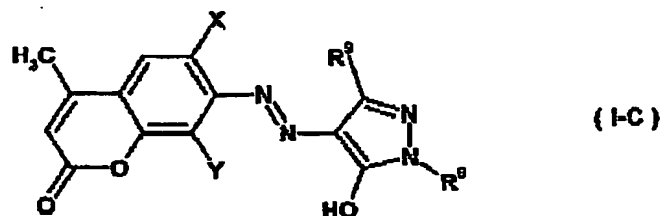

wherein

X signifies H; halogen, preferably Cl or Br; $-OH$; $-OCH_3$ or NO_2 ;

Y signifies H,

R⁸ signifies H; C₁₋₆-alkyl; substituted C₂₋₄-alkyl, preferably substituted by one substituent of the group consisting of halogen, -CN, -OH, -OC₁₋₄-alkyl, -OCOC₁₋₂-alkyl, -OC₆H₅ and -C₆H₅ or C₁₋₂-alkylene-COOR⁵; -NHC₆H₅ or -NH₂,

R⁹ signifies C₁₋₄-alkyl; phenyl or -CF₃,
as well as mixtures thereof.


Any alkyl present is linear or branched unless indicated to the contrary.

Any substituted alkyl present can be optionally substituted by one or more identical or different substituent.

Halogen atoms are preferably chlorine or bromine.

The above-mentioned novel compounds as well as mixtures thereof are very useful disperse dyestuffs.

Production of these dyestuffs is effected by coupling a diazotized amine of formula (II)



(II)

wherein all substituents have the meanings given in anyone of the preceding claims with the proviso X and / or Y does not signify -CN
is coupled with an amine of formula (III)

H—K

(III)

wherein all substituents have the meanings as defined above.

For the Preparation of the cyano derivatives of compound (I) a further step may comprise the partially or complete cyanation of the bromo derivatives of the compound according to formula (I) wherein X and / or Y signify -Br.

5 Diazotization and coupling are effected by generally known processes.

The diazotization is carried out, for example using sodium nitrite in acid aqueous medium. The diazotization can also be carried out using other diazotization agents, for example nitrosyl sulfuric acid. An additional acid may be present in the reaction medium during diazotization, for example phosphoric acid, sulfuric acid, acetic acid, 10 propionic acid, hydrochloric acid or mixtures of these acids, e.g. mixtures of phosphoric acid, and acetic acid. Diazotization is conveniently carried out within the temperature range of from -10 to 10°C, preferably from 0°C to 5°C.

15 Coupling of the diazotized compound of formula (II) to the coupling component of formula H-K (III) is carried out in known manner, for example in acid, aqueous or aqueous-organic medium, preferably within the temperature range from 0°C to 50°C, more preferably from 10°C to 20°C. Acid used are, for example hydrochloric acid, acetic acid, sulfuric acid or phosphoric acid. For example diazotization and coupling can 20 be carried out in the same reaction medium.

Alkali metal nitrites, such as, for example, sodium nitrite, in solid form or as an aqueous solution, or in nitrosylsulfuric acid are employed as the nitrosating agents.

The preparation of the diazonium ion, typically through the reaction with excess nitrous 25 acid or the like such as nitrosyl sulfuric acid at low temperature to form the electrophilic ion Aryl-N_2^+ is published in the literature, e.g. in [Advanced Organic Chemistry, Fieser&Fieser, pages 736-740] or [Organische Chemie, K.Peter C.Vollhardt, pages 1154-1157, 1.Auflage 1988].

30 The compound of formula (II), wherein X and Y signify hydrogen is known [V.F. Pozdnev, Khim Geterosikl. Soedin. 1990, 3, 312] and the compounds of formulae (III) may easily be produced in a manner familiar to the person skilled in the art.

The compound of formula (II), wherein X and / or Y signifie bromine group are synthesized analogously to example 1 in DE 196 43 769 A1.

5 The dyes of formula (I), wherein X and / or Y signify a cyano group are prepared analogously to example 1 of EP 554 695 A1 by exchange of the bromine by the -CN group.

10 The new dyestuffs of formula (I) as well as mixtures thereof can be used for dyeing and printing semisynthetic and, preferably, synthetic hydrophobic fiber materials, especially textile materials. Textile materials consisting of blended fabrics containing such semisynthetic hydrophobic fiber materials can also be dyed or printed by means of the dyes of this invention.

15 Suitable semisynthetic textile materials are mainly cellulose-2½ acetate, cellulose triacetate, polyamides and high molecular weight polyesters as well as mixtures thereof with cellulose.

20 Synthetic hydrophobic textile materials consist mainly of linear aromatic polyester, for example of those consisting of terephthalic acid and glycols, in particular ethylene glycol or condensate of terephthalic acid and 1,4-bis(hydroxymethyl)cyclohexane; of polycarbonates, e.g. those consisting of α,α-dimethyl-4,4'-dihydroxydiphenylmethane and phosgene, and of fibers based on polyvinyl chloride and polyamide.

25 The hydrophobic synthetic materials can be in the form of sheet-like or thread-like structures, and can be processed, for example, to yarns or woven, knitted or looped textile fabrics. The novel dyes are also suitable for dyeing hydrophobic synthetic material in the form of micro fibers.

30 It is expedient to convert the novel dyes according to formula (I) before use into a dye formulation. This is done by milling the dye to an average particle size of 0.1 to 10 micron. Milling can be carried out in the presence of dispersants. Typically, the wet dye is milled with a dispersant, and thereafter dried under vacuum or by spray drying. Printing pastes and dyebaths can be prepared by adding water to the formulation so obtained.

The new dyestuffs according to formula (I) are applied to the textile materials by known dyeing or printing methods, e.g. those described in French patent application No. 1.445.371.

5

Typically, polyester fiber materials are dyed from an aqueous dispersion by the exhaust process in the presence of customary anionic or non-ionic dispersants and in the presence or absence of customary swelling agents (carrier) in the temperature range from 65°C to 140°C.

10

Cellulose-2½-acetate is preferably dyed at a temperature from 65°C to 85°C and cellulose triacetate at temperatures up to 115°C.

The novel dyes are suitable for dyeing by the thermosol process, for the exhaust process, the continuous process and for printing as for modern imaging processes, e.g.

15 thermo-transfer printing, ink-jet printing, hot melt inkjet printing or by conventional printing processes.

The thermosol process, the exhaust process and the continuous process are well known dyeing processes and are described for example in M. Peter and H.K. Rouette:

20 "Grundlagen der Textilveredelung; Handbuch der Technologie, Verfahren und Maschinen", 13th revised Edition, 1989, Deutscher Fachverlag GmbH, Frankfurt am Main, Germany, ISBN 3-87150-277-4; wherein the following pages are of special interest: pages 460-461, 482-495, 556-566 and 574-587.

25 In the inkjet printing process, individual droplets of the ink are sprayed from a nozzle onto a substrate in a controlled manner. The continuous inkjet method and the drop-on-demand method are employed predominantly for this purpose. In the case of the continuous inkjet method, the droplets are produced continuously and droplets not needed for printing are diverted into a collecting vessel and recycled. In the case of the
30 discontinuous drop-on-demand method, by contrast, droplets are generated and printed as desired, i.e. droplets are only generated when this is necessary for printing. The droplets may be generated for example by means of a piezo inkjet head or by means of thermal energy (bubble jet).

In hot melt inkjet printer solid hot melt inks are loaded in a printer capable of melting the ink in the inkjet printer head, ejecting the liquid ink which quickly resolidifies upon impacting a substrate. Conventional hot melt inkjet printers operate with a printing head and inkjet temperature of about 120 to about 150°C. At those temperatures, the solid ink is melted to a low viscosity liquid, generally about 8 to 25 cP when measured at jetting temperature.

Conventional printing processes are well known and differ in the way the printing ink or printing paste is transferred to the substrate: For example, inks or pastes can be applied by raised type (e.g. letter press, flexographic), from a planar surface (lithographic), from a recessed surface (intaglio) or through a stencil (silk screen). Different methods of application and different substrates require different properties in the ink.

The dyeings are carried out from an aqueous liquor by the exhaust process, and the liquor ration can be chosen from a wide range, for example from 1:4 to 1:100, preferably from 1:6 to 1:50.

The dyeing time is from 20 to 90 minutes, preferably from 30 to 60 minutes.

The dye liquors can additionally comprise other additives, for example dyeing auxiliaries, dispersants, wetting agents and antifoams.

The liquor may also comprise mineral acids, such as sulfuric acid or phosphoric acid, or conveniently also organic acids, for example formic acid or acetic acid and/or salts, such as ammonium acetate, ammonium sulfate or sodium sulfate. The acids mainly serve to adjust the pH of the dye liquors which is preferably in the range from 4 to 5.

The disperse dyes are usually present in the dye liquors in the form of a fine dispersion. Suitable dispersants for the preparation of this dispersion are e.g. anionic dispersants, such as aromatic sulfonic acid/formaldehyde condensates, sulfonated creosol oil/formaldehyde condensates, lignin sulfonates or copolymers of acrylic acid derivatives, preferably aromatic sulfonic acid/formaldehyde condensates or lignin sulfonated, or nonionic dispersants based on polyalkylene oxides obtainable, for examples, by

polyaddition reaction from ethylene oxide or propylene oxide. Further suitable dispersants are listed in US 4,895,981 or in US 5,910,624.

Suitable inks or pastes comprise a) at least one dye of the formula (I) or mixtures of
5 compounds of the formula (I), b) water or a medium including a mixture of water and
an organic solvent, an anhydrous organic solvent or a solid having a low melting point,
and c) optionally further additives.

The inks or pastes preferably include a total amount of dyes of the above formula (I).
10 which is in the range from 1 to 35% by weight, especially in the range from 2 to 35% by
weight, preferably in the range from 2 to 30% by weight, more preferably in the range
from 2.5 to 20% by weight, based on the total weight of the ink or paste.

The inks include 99-65% by weight, especially 98-65% by weight, preferably 98-70%
by weight, more preferably 97.5-80% by weight, of an abovementioned medium b),
15 which includes water or a mixture of water and an organic solvent, an anhydrous
organic solvent or a solid having a low melting point.

When said medium b) is a mixture including water and an organic solvent or an
anhydrous organic solvent, then the dye of formulae (I) or mixtures thereof are
20 preferably completely dissolved in this medium.

Preferably the dye of formulae (I) or mixtures thereof have a solubility of not less than
2.5% by weight in this medium b) 0 at 20°C.

25 When the ink composition of the invention is used for printing papery substrates or
hydrophobic substrates made of acetate-, polyester-, polyamide-, polyacrylnitrile-,
polyvinylchloride- or polyurethane- polymers and blends thereof, the inks are preferably
used together with the following compositions.

30 When the medium is a mixture of water and an organic solvent, the weight ratio of
water to organic solvent is preferably in the range from 99:1 to 1:99, more preferably in
the range from 99:1 to 50:50, particularly preferably in the range from 95:5 to 80:20.

It is preferable for the organic solvent which is included in the mixture with water to be a water-soluble solvent or a mixture of various water-soluble solvents. Preferred water-soluble organic solvents are C₁₋₆-alcohols, preferably methanol, ethanol, n-propanol, isopropanol, n-butanol, sec-butanol, tert-butanol, n-pentanol, cyclopentanol and cyclohexanol; linear amides, preferably dimethylformamide or dimethylacetamide; ketones and keto alcohols, preferably acetone, methyl ethyl ketone, cyclohexanone and 4-hydroxy-4-methyl-2-pentanone; water-miscible ethers, preferably tetrahydrofuran and dioxane; diols, preferably diols possessing 2 to 12 carbon atoms, e.g. 1,5-pentanediol, ethylene glycol, propylene glycol, butylene glycol, pentylene glycol, hexylene glycol, thiodiglycol and oligo- and poly-alkylene glycols, preferably diethylene glycol, triethylene glycol, polyethylene glycol and polypropylene glycol; triols, preferably glycerol and 1,2,6-hexanetriol; mono-C₁₋₄-alkyl ethers of diols, preferably mono-C₁₋₄-alkyl ethers of diols possessing 2 to 12 carbon atoms, particularly preferably 2-methoxyethanol, 2-(2-methoxyethoxy)ethanol, 2-(2-ethoxyethoxy)ethanol, 2-[2-(2-methoxyethoxy)ethoxy]ethanol, 2-[2-(2-ethoxyethoxy)ethoxy]ethanol and ethylene glycol monoalkyl ether; cyclic amides, preferably 2-pyrrolidone, N-methyl-2-pyrrolidone, N-ethyl-2-pyrrolidone, caprolactam and 1,3-dimethylimidazolidone; cyclic esters, preferably caprolactone; sulphoxides, preferably dimethyl sulphoxide and sulpholane.

20

In a preferred composition, the medium as per b) includes water and at least 2 or more, more preferably 2 to 8, water-soluble organic solvents.

Particularly preferred water-soluble solvents are cyclic amides, particularly 2-pyrrolidone, N-methylpyrrolidone and N-ethylpyrrolidone; diols, preferably 1,5-pentanediol, ethylene glycol, thiodiglycol, diethylene glycol and triethylene glycol; and mono-C₁₋₄-alkyl and di-C₁₋₄-alkyl ethers of diols, more preferably mono-C₁₋₄-alkyl ethers of diols possessing 2 to 12 carbon atoms, particularly preferably 2-[2-(2-methoxyethoxy)ethoxy]ethanol.

30

A preferred medium as per b) includes:

(i) 75 to 95 parts by weight of water and

(ii) 25 to 5 parts of one or more of the following solvents: diethylene glycol, 2-pyrrolidone, thiodiglycol, N-methylpyrrolidone, cyclohexanol, caprolactone, caprolactam and 1,5-pentanediol,

wherein the parts are by weight and all parts of (i) and (ii) add up to 100.

5

Examples of further useful ink compositions including water and one or more organic solvents are found in the Patent Specifications US 4963189, US 4703113, US 4626284 and EP 425150A.

10 When the medium as per b) includes an anhydrous (i.e. less than 1% by weight of water) organic solvent, this solvent will have a boiling point of 30 to 200°C, more preferably of 40-150°C, particularly preferably of 50-125°C.

The organic solvent can be water-insoluble, water-soluble or mixtures of such solvents. Preferred water-soluble organic solvents are all above-described water-soluble organic solvents and mixtures thereof.

15

Preferred water-insoluble solvents include inter alia aliphatic hydrocarbons; esters, preferably ethyl acetate; chlorinated hydrocarbons, preferably CH_2Cl_2 ; and ethers, preferably diethyl ether; and mixtures thereof.

20 When the liquid medium as per b) includes a water-insoluble organic solvent, it is preferable to add a polar solvent to increase the solubility of the dye in the liquid medium.

Examples of such polar solvents are C_{1-4} -alcohols, preferably ethanol or propanol; 25 ketones, preferably methyl ethyl ketone.

The anhydrous organic solvent can consist of a single solvent or a mixture of 2 or more different solvents.

30 When it is a mixture of different solvents, a mixture including 2 to 5 different anhydrous solvents is preferred. This makes it possible to provide a medium as per b) which permits good control of the drying properties and of the stability of the ink composition in storage.

5 Ink compositions including an anhydrous organic solvent or mixtures thereof are of particular interest when rapid drying times are required and especially when they are used for prints on hydrophobic and non-absorbing substrates, such as plastic, metal and glass.

10 Preferred low-melting media have a melting point of 60 to 140°C. Useful low-melting solids include long-chain fatty acids or alcohols, preferably those having a C₁₈₋₂₄-carbon chain, and sulphonamides. Conventional low-melting ink vehicles generally include various proportions of waxes, resins, plasticizers, tackifiers, viscosity modifiers and antioxidants.

15 The ink composition and the printing pastes of the invention may further include as auxiliaries additional components which are normally used in inkjet inks or printing pastes, for example buffers, viscosity improvers, surface tension improvers, fixation accelerants, biozides, corrosion inhibitors, levelling agents, drying agents, humectants, ink penetration additives, light stabilisers, UV absorbers, optical brighteners, coagulation reducers, ionic or nonionic surfactants and conducting salts.

20 These auxiliaries are preferably added in an amount of 0-5% by weight to inks. To printing pastes up to 70% by weight, especially up to 60% by weight, preferably up to 55% by weight, based on the total weight of the printing paste.

25 To prevent precipitations in the ink compositions of the invention, the dyes used have to be purified clean. This can be done with commonly known purifying methods.

When the compositions of the invention are used for printing textile fibre materials, preference is given to using the following compositions.

30 When printing textile fibre materials, useful additives, besides the solvents including water, are synthetic thickener, natural thickener or modified natural thickeners which may include water-soluble nonionic cellulose ethers, alginates or bean gum ether. All,

the water-soluble nonionic cellulose ethers, the alginates and the bean gum ether, are used as thickeners to adjust the ink to a certain viscosity.

- Useful water-soluble nonionic cellulose ethers include for example methyl-, ethyl-,
5 hydroxyethyl-, methylhydroxyethyl-, hydroxypropyl- or hydroxypropylmethyl-
cellulose. Preference is given to methylcellulose or in particular hydroxyethylcellulose.
Cellulose ethers are customarily used in the ink in an amount of 0.01 to 2% by weight,
especially 0.01 to 1% by weight, preferably 0.01 to 0.5% by weight, based on the total
weight of the ink.
- 10 Useful alginates include in particular alkali metal alginates, preferably sodium alginate.
These are customarily used in the ink in an amount of 0.01 to 2% by weight, especially
0.01 to 1% by weight, preferably 0.01 to 0.5% by weight, based on the total weight of
the ink.
- 15 Printing pastes include up to 70% by weight thickening agents, preferably up to 55% by
weight thickening agents. In printing pastes the thickening agents are used in an amount
of 3 to 70% by weight, especially 5 to 60% by weight, preferably 7 to 55% by weight,
based on the total weight of the printing paste.
- 20 In the ink jet printing process preference is given to ink compositions having a viscosity
of 1 to 40 mPa.s, especially 5 to 40 mPa.s, preferably 10 to 40 mPa.s. Ink compositions
having a viscosity of 10 to 35 mPa.s are particularly preferred.
- Preference is given to ink compositions having a surface tension of 15-73 mN/m,
25 especially 20-65 mN/m, particularly preferably 30-50 mN/m.
- Preference is given to ink compositions having a conductivity of 0.1-100 mS/cm,
especially 0.5-70 mS/cm, particularly preferably 1.0-60 mS/cm.
- 30 The inks may further include buffer substances, for example acetate, phosphate, borax,
borate or citrate. Examples are sodium acetate, di-sodium hydrogen phosphate, sodium
borate, sodium tetraborate and sodium citrate.

The dyeings or printings thus obtained, have good all-round fastness; particularly noticeable are the thermo-migration fastness, thermo-fixation-, and pleating fastness, as well as the excellent wet fastness.

- 5 In the following examples, the parts and percentages are by weight. The temperatures are given in degrees Celsius.

EXAMPLE 1

Diazotization:


- 10 17.5 parts of 7-amino-4-methylcoumarin are dissolved in 100 parts of water and 36.5 parts of 30% HCl, 75 parts of ice are added and afterwards during a period of 1 hour 6.9 parts of sodium nitrite as an aqueous solution (40%) are added at a temperature of 0 - 5°C. The solution is stirred for 2 hours at 0 - 5°C and 0.1 part of aminosulfonic acid are added to destroy the excess of sodium nitrite.

15

Coupling:

- The previously prepared diazonium salt solution is added continuously to a solution of 20.6 parts of 1-N-butyl-3-cyano-6-hydroxy-4-methyl-pyridon-2 in 400 parts water at a temperature of 15-25°C. The suspension is stirred for 1 h at 25°C and the pH is adjusted
- 20 to 4 by addition of 10 parts of 30% sodium hydroxide solution. The suspension is stirred again for 1 h and the precipitated dyestuff is filtered off, washed with water and dried in the vacuum at 60°C.

The isolated dyestuff of formula (IV)

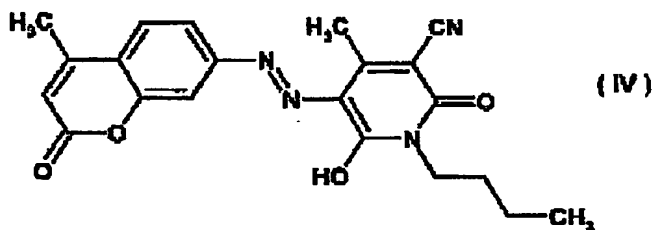


- 25 has a λ_{max} of 449 nm (in DMF) and dyes polyester in yellow shades with good fastness properties.

EXAMPLE 2**Diazotization:**

The diazotization is done analogously as in Example 1.

- 5 The previously prepared diazonium salt solution is added continuously to a solution of 10.3 parts of 1-N-butyl-3-cyano-6-hydroxy-4-methyl-pyridon-2 and 9.6 parts of -N-propyl-3-cyano-6-hydroxy-4-methyl-pyridon-2 in 400 parts water at a temperature of 15-25°C. The suspension is stirred for 1 h at 25°C and the pH is adjusted to 4 by addition of 10 parts of 30% sodium hydroxide solution. The suspension is stirred again
- 10 for 1 h and the precipitated dyestuff is filtered off, washed with water and dried in the vacuum at 60°C.

The isolated dyestuff mixture of formula (V-A) and (V-B)

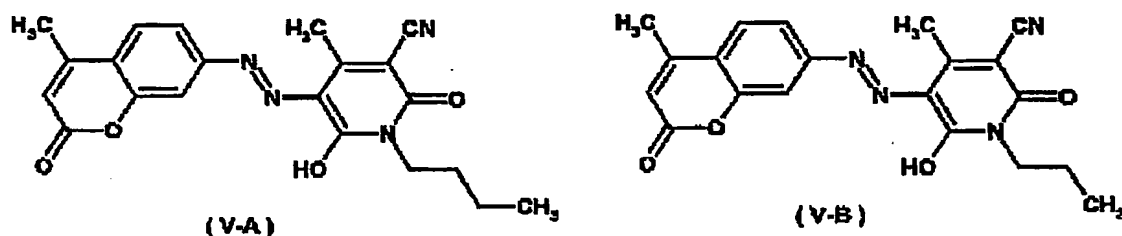


- 15 has a λ_{max} of 449 nm (in DMF) and dyes polyester in yellow shades with good fastness properties.

Table 1, 2 and 3 below, give further dyestuffs of formula (I-A), (I-B) and (I-C), which are produced analogously to the procedures given in the preceding example.

20

All dyestuffs dye polyester fiber material with very good all-round fastness, especially fastness to light, sublimation and wet fastness.

TABLE 1 / Examples 3 - 15

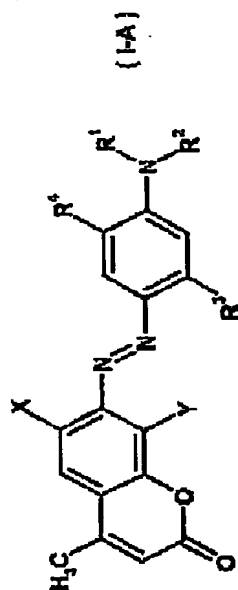


Ex. No.	X	Y	R ⁴	R ³	R ²	R ¹	λ_{\max} DMF [nm]
3	H	H	H	H	-CH ₂ CH ₃	-CH ₂ CH ₂ -CN	455
4	H	H	H	-CH ₃	-CH ₂ CH ₃	-CH ₂ CH ₂ -CN	467
5	H	H	H	-CH ₃	-CH ₃	-CH ₂ CH ₂ -CN	462
6	H	H	H	H	-CH ₂ -CH=CH ₂	-CH ₂ CH ₂ -CN	460
7	H	H	H	H	-CH ₂ C \equiv CH	-CH ₂ CH ₂ -CN	451
8	H	H	H	H	-CH ₂ CH(OH)CH ₃	-CH ₂ CH ₂ -CN	456
9	H	H	H	H	-CH ₂ CH ₂ OCOCH ₃	-CH ₂ CH ₂ OCOCH ₃	451
10	H	H	H	H	-CH ₂ CH ₂ COOCH ₃	-CH ₂ CH ₂ COOCH ₃	449
11	H	H	H	-NHCOCH ₃	-CH ₂ CH ₂ OCOCH ₃	-CH ₂ CH ₂ -CN	476
12	H	H	H	-NHCOCH ₃	-CH ₂ CH ₂ OCOCH ₃	-CH ₂ CH ₂ OCOCH ₃	486
13	H	H	H	-NHCOCH ₃	-CH ₂ CH ₃	-CH ₂ CH ₃	506
14	Br	Br	H	-NHCOCH ₃	-CH ₂ CH ₃	-CH ₂ CH ₃	554
15	Br	CN	H	-NHCOCH ₃	-CH ₂ CH ₃	-CH ₂ CH ₃	576

Case 2002CH009

17

TABLE 2 / Examples 16 - 25

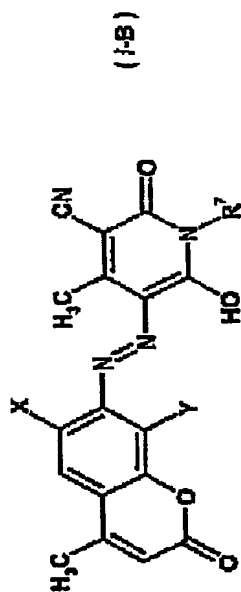

Ex. No.	X	Y	R ⁷	λ_{max} DMF [nm]
16	H	H	-CH ₃	446
17	H	H	-CH ₂ CH ₃	448
18	H	H	-CH ₂ CH ₂ -CH ₃	449
19	H	H	-CH ₂ CH ₂ CH ₂ CH ₂ CH ₃	449
20	H	H	-CH ₂ CH ₂ CH ₂ -O-CH ₂ CH ₂ CH ₂ CH ₃	448
21	H	H	-CH ₂ -C ₆ H ₅	449
22	H	H	-CH ₂ CH ₂ -OH	448
23	H	H	-CH ₂ CH ₂ COOCH ₃	449
24	H	H	-CH ₂ COOCH ₃	449
25	H	H	-NH-C ₆ H ₅	449

Case 2002CH009

18

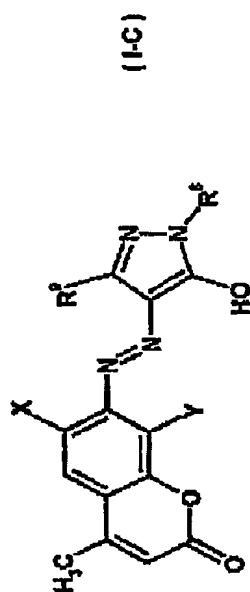


TABLE 3 / Examples 26 - 30

Ex. No.	X	Y	R ⁹	R ⁸	λ_{max} DMF [nm]
26	H	H	CH ₃	-C ₆ H ₅	411
27	H	H	C ₂ H ₅	-C ₆ H ₅	413
28	H	H	CF ₃	-C ₆ H ₅	467
29	H	H	-CH ₂ CH ₂ CH ₃	-CH ₃	407
30	H	H	CH ₃	-H	427

APPLICATION EXAMPLE A

17.5 parts of the dyestuff according to example 1 in the form of the moist presscake are
5 wet-ground by a known method with 32.5 parts of a commercial dispersing agent based
on lignin sulfonates, and pulverized to a powder. 1.2 parts of this dye preparation are
added to 2000 parts of demineralized water of 70°C, which contains 40 parts of
ammonium sulfate; the pH value of the dye bath is set at 5 with 85% formic acid. 100
10 parts of washed polyester fiber fabric are placed in this dye bath, the container is closed,
heated to 130°C over the course of 20 minutes, and dyeing continues for a further 60
minutes at this temperature. After cooling, the polyester fiber fabric is removed from the
dye bath, rinsed, soaped and cleaned by reduction with sodium hydrosulfite in the usual
way. After thermo-fixation (180°C, 30 sec), a yellow dyeing is obtained with very good
all-round fastness, especially fastness to light and sublimation, in particular excellent
15 wet fastness. The dyestuffs of examples 2 to 30 may be used in analogous manner, and
dyeings with very good all-round fastness are obtained.

Dyeing polyester yarn can be carried out analogously with examples 2 - 30.

20

APPLICATION EXAMPLE B

2.5 parts of the dyestuff obtained in Example 1 are dissolved with stirring at 25°C in a
mixture of 20 parts diethyleneglycol and 77.5 parts water to obtain a printing ink
25 suitable for ink jet printing.

The dyestuffs of Examples 2 to 30 or dyestuff mixtures of Examples 1 to 30 can also be
used in a manner analogous to that described in Application Example B.

APPLICATION EXAMPLE C

A printing paste according to the invention consists of

- 5 500g of a thickener (bean gum ether e.g. Indalca TM),
 - 10g of a fixation accelerant (e.g. Printogen HDN TM),
 - 10g of a levelling agent (e.g. Sandogen CN TM),
 - 10g of a buffer and dispersant system for dyeing (eg. Sandacid PB TM; 1:2) and
 - 10g of a dye of example 1
- 10 and adding water up to 1000g.

(Indalca was purchased from Cesalpinia S.p.A, Italy; Sandogen, Printogen and Sandacid are a trademarks of Clariant AG, Muttenz/Switzerland.)

- 15 This printing paste is used for printing papery substrates, textile fibre materials and plastic films and plastic transparencies.

The dyestuffs of Examples 2 to 30 or dyestuff mixtures of Examples 1 to 30 can also be used in a manner analogous to that described in Application Example C.

20 APPLICATION EXAMPLE D

- A polyester Interlock fabric was printed with a conventional printing machine using the printing paste of the **APPLICATION EXAMPLE C**. The resulting printed fabric is dried for 3 minutes at 110°C and then treated with hot steam for 7 minutes at 175°C.
- 25 The fabric was rinsed with cold tap water for 5 minutes, and then rinsed for 5 minutes with demineralised water. The so treated fabric was reductively cleansed in a bath comprising 4g/l Na₂CO₃, 2 g/l hydrosulfite sodium salt (85%) and 1 g/l Lyogen DFT TM (Trademark of Clariant AG, Muttenz, Switzerland). Further rinsing for 15 minutes with tap water was followed by a final drying step. This leaves a polyester fabric with a
- 30 yellow print with very good all-round fastness, especially fastness to light and sublimation and wet fastness.

The dyestuffs of Examples 2 to 30 or dyestuff mixtures of Examples 1 to 30 can also be used in a manner analogous to that described in Application Example D.

APPLICATION EXAMPLE E

5

The ink jet printing composition is preferably prepared by heating the medium to 40°C and then adding a dye of the example 1. The mixture is stirred until the dyes are dissolved. The composition is then cooled down to room temperature and the further ingredients are added.

10

The fractions of the individual components of the ink compositions

6 parts of the dye of example 1,

20 parts of glycerol and

74 parts of water.

15 This ink composition is used for printing papery substrates, textile fibre materials and plastic films and plastic transparencies.

The dyestuffs of Examples 2 to 30 or dyestuff mixtures of Examples 1 to 30 can also be used in a manner analogous to that described in Application Example E.


20

APPLICATION EXAMPLE F

A polyester Interlock fabric was ink jet printed using the printing ink of the APPLICATION EXAMPLE E. The printed fabric was treated analogously to the post printing treatment of APPLICATION EXAMPLE D. This leaves a polyester fabric with a yellow print with very good all-round fastness, especially fastness to light and sublimation, in particular excellent wet fastness.

25 The dyestuffs of Examples 2 to 30 or dyestuff mixtures of Examples 1 to 30 can also be used in a manner analogous to that described in Application Example F.

30

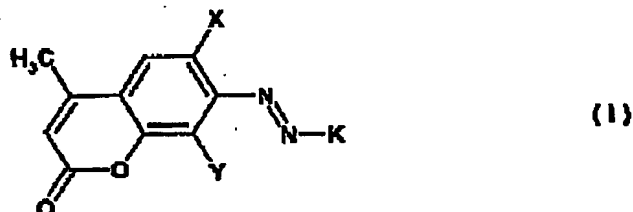CLAIMS**1. A dyestuffs of formula (I)**


5

wherein

X signifies H; halogen, preferably Cl or Br; -CN; -SO₂CH₃; -OH; -OCH₃ or -NO₂,

Y signifies H; halogen, preferably Cl or Br; or -CN, and

K signifies a coupling component radical of the 6-hydroxypyridone-2, aniline,
 10 α-naphthylamine, 5-aminopyrazole, 5-hydroxypyrazole, indole, tetrahydrochinoline, 2-
 aminothiazole, 2-aminothiophene, phenole, 2-naphthol, benzomorpholine or 2,6-
 diaminopyridine series.

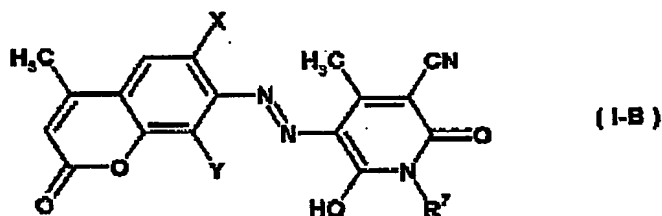2. Dyestuff according to Claim 1 of formula (I-B)

15


wherein

X signifies H; halogen, preferably Cl or Br; -OH; -OCH₃ or NO₂

Y signifies H,

R⁷ signifies H; C₁₋₆-alkyl; substituted C₂₋₄-alkyl, preferably substituted by one
 20 substituent of the group consisting of halogen, -CN, -OH, -OC₁₋₄-alkyl, -OCOC₁₋₂-alkyl,
 -OC₆H₅ and -C₆H₅ or C_{1,2}-alkylene-COOR⁵; -NHC₆H₅ or -NH₂,
 as well as mixtures thereof.

3. Dyestuff according to Claim 1 of formula (I-A)

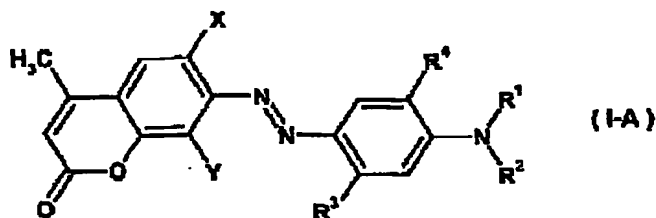

wherein

5 X signifies H; halogen, preferably Cl or Br; -CN, -OH; -OCH₃ or -NO₂,

Y signifies H; halogen, preferably Cl or Br; or -CN, and

R¹ signifies C₁₋₆-alkyl; substituted C₂₋₄-alkyl, preferably substituted by one or more
substituents of the group consisting of halogen, -CN, -SCN -OC₁₋₄-alkyl, -
OCOC₁₋₃-alkyl, -OCHO, -OC₆H₅ and -C₆H₅; C₃₋₄-alkenyl; substituted C₃₋₄-
10 alkenyl, preferably substituted by -Cl or -Br; C₃₋₄-alkinyl, preferably
propargyl; C₂₋₄-alkylene-OCO-C₁₋₃-alkyl; C₂₋₄-alkylene-O(CO)O-C₁₋₃-
alkyl; C₁₋₃alkylene-COO-R⁵; -C₁₋₃-alkylene-COO-C₂₋₃-alkylene-N-
phthalimid; C₁₋₃-alkylene-COOCH₂COOR⁵ or C₁₋₃-alkylene-
COOCH₂COR⁶,

15 wherein R⁵ signifies C₁₋₄-alkyl; C₁₋₂-alkoxyethyl; C₃₋₄-alkenyl; C₃₋₄-alkinyl;
cinnamyl; phenoxyethyl; phenyl-C₁₋₃alkyl; tetrahydro-
furfuryl-2; phenyl or phenyl, which is substituted by -CH₃,
-OCH₃, -COOCH₃ or -COOC₂H₅,

R⁶ signifies C₁₋₄-alkyl; phenyl or substituted phenyl, preferably
20 substituted by one or more substituents of the group
consisting of -CH₃, -OCH₃, -OC₂H₅, halogen and -OH,

R² signifies H; C₁₋₆-alkyl; substituted C₂₋₄-alkyl, preferably substituted by one
or more substituents of the group consisting of halogen, -CN, -
OH, -OC₁₋₄-alkyl, -OCOC₁₋₃-alkyl, -OC₆H₅ and -C₆H₅; C₃₋₄-
alkenyl; substituted C₃₋₄-alkenyl, preferably substituted by -Cl or
-Br; C₃₋₄-alkinyl, preferably propargyl;
C₂₋₄-alkylene-OCO-C₁₋₃-alkyl or C₁₋₃alkylene-COO-R⁵,

R³ signifies H; CH₃; -NHCO-A¹ or -NHCOO-A²,


wherein

A¹ signifies H; C₁₋₄-alkyl; C₂₋₃-alkenyl; phenyl; -NH₂ or substituted C₁₋₂-alkyl, preferably substituted by one or more substituents of the group consisting of -OH, -Cl, -OCH₃, OC₂H₅ and -C₆H₅.

A² signifies C₁₋₄-alkyl or substituted C₂₋₄-alkyl, preferably substituted by one substituents of the group consisting of -Cl, -OCH₃ and -OC₂H₅, and

R⁴ signifies H; halogen or C₁₋₄alkoxy,
as well as mixtures thereof.

10 4. Dyestuff according to Claim 1 of formula (I-C)

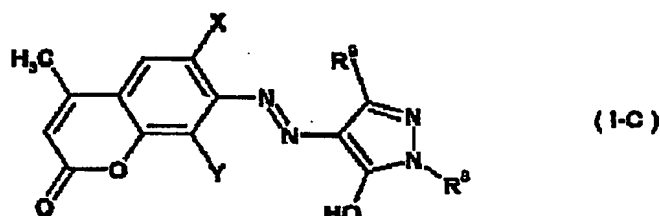

wherein

X signifies H; halogen, preferably Cl or Br; -OH; -OCH₃ or NO₂;


Y signifies H,

15 R⁸ signifies H; C₁₋₆-alkyl; substituted C₂₋₄-alkyl, preferably substituted by one substituent of the group consisting of halogen, -CN, -OH, -OC₁₋₄-alkyl, -OCOC₁₋₂-alkyl, -OC₆H₅ and -C₆H₅ or C₁₋₂-alkylene-COOR⁵; -NHC₆H₅ or -NH₂,

R⁹ signifies C₁₋₄-alkyl; phenyl or -CF₃,

20 as well as mixtures thereof.

5. Process for the production of a dyestuff of formula (I), according to claim 1, 2, 3, or 4 claims, characterized in that a diazotized amine of formula (II)

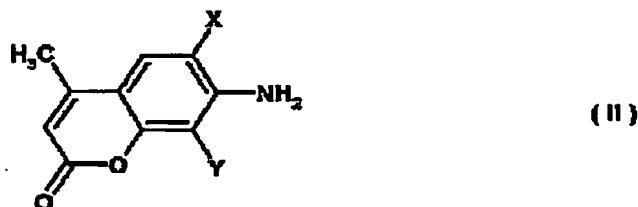

wherein all substituents have the meanings given in anyone of the preceding claims with the proviso X and / or Y does not signify -CN is coupled with an amine of formula (III)

5

H—K

(III)


wherein all substituents have the meanings given in anyone of the preceeding claims.

- 10 6. A Process according to claim 5 wherein a further step comprises the partially or complete cyanation of the bromo derivatives of the compound according to formula (I) wherein X and / or Y signify -Br.
- 15 7. Use of a disperse dyestuff of formula (I) or mixtures thereof, according to claim 1, 2, 3 or 4, for dyeing or printing fibers or threads or materials produced therefrom, which comprise, fully or semi-synthetic, hydrophobic, organic materials.
- 20 8. Use of a disperse dyestuff of formula (I) or mixtures thereof, according to claim 1, 2, 3 or 4, for the inkjet printing process or hot melt inkjet process.
9. Composition comprising a dyestuff of formula (I) or mixtures thereof according to claim 1, 2, 3 or 4.
- 25 10. Composition according to claim 9 wherein the composition is a printing paste or a printing ink or a inkjet printing ink or a hot melt inkjet printing ink.
11. Fibers or threads or materials produced thereof, which comprise fully or semi-synthetic, hydrophobic, organic materials which has been dyed or printed with a dyestuff of formula (I) or mixtures thereof, as claimed in claim 1, 2, 3 or 4.

ABSTRACT

The present invention relates to novel dyestuffs of formula (I)

5



(I)

wherein the substituents have the meanings defined in the claims, the production of such dyestuffs, the use of these dyestuffs and material dyed or printed by such dyestuffs.

10

PCT Application
IB0304611



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.